

# STANDARD BRAKE DISCS and HUBS

**DB 5002**

Issue 6

Date: Dec 1989

## DISC HUBS

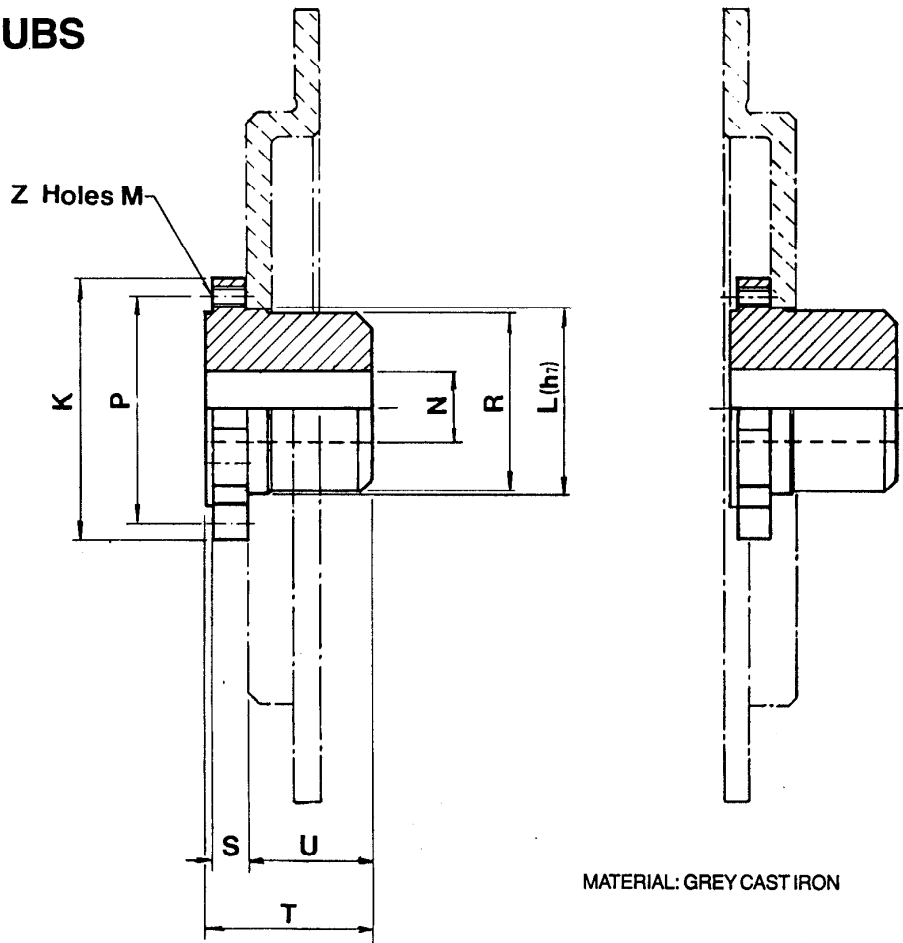


Table 3 Range of Hubs used with Twiflex Brake Discs

Hub Size	Part No.	K	L (h7)	N* from to	P	R	S	T	U	Z	M	Disc Size	Max. Brake Torque (kNm)	WR <sup>2</sup> (kgm <sup>2</sup> )
112	8100166	99	65	14-42	82	64.5	14	58	42.5	6	M8	250	1.1	0.0097
168	8100167	146	105	28-65	126	104.5	18	87	66.5	8	M10	300 and above	3.6	0.0088
240	8100168	200	147	60-95	175	146	21	117	93.5	10	M12	400 and above	9.5	0.044
330	8100169	272	209	75-130	240	208	27	155	125.5	10	M16	400 and above	24.0	0.23
370	8100170	308	242	90-150	274	241	29	176	143	11	M16	515 and above	30.0	0.35

\*Hubs can be supplied with parallel or taper bores, and keywayed to order, at extra cost.



Distribuidor para España:  
**FU IBERICA, S.L.**

Trafalgar, 4, planta 5  
Tel. 268 18 33 - Fax. 268 32 92  
08010 BARCELONA