




FRENO NEUMATICO MULTIDISCO DIRECTO

PBL/BF

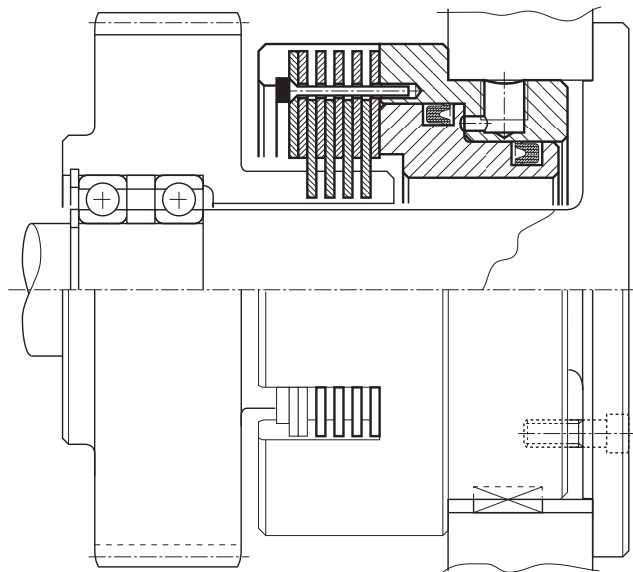

FRENO NEUMÁTICO MULTIDISCO PBL/BF

Para hacer su aplicación lo más fácil posible, hay disponibles dos variantes de estos frenos, que difieren sustancialmente entre sí desde el punto de vista de la construcción y la aplicación, pero ambos con las mismas características técnicas.

El primer tipo (PBL-BF / SC) debe estar conectado a un eje fijo, en el que luego se monta libremente una carcasa de copa: en un lado, esta carcasa de copa se fresa para anclar los discos exteriores del freno. Los componentes móviles a frenar se fijan en el otro lado.

El segundo tipo (PBL-BF) se debe fijar a una pared y se debe montar un cubo fresado en el eje giratorio; Este cubo se insertará en las aletas de los discos internos.

Ambos tipos tienen cilindros fijos con pistones de trabajo, cuyas ventajas se describen completamente en la introducción sobre embragues de cilindros estáticos.

Para la aplicación en seco (PBL-BF y PBL / SC-BF), se utiliza una combinación de discos de freno de bronce y acero.

PNEUMATIC MULTIDISK BRAKES

To make as easy as possible their application, two variants of these brakes are available, which differ from each other substantially from a point of view of construction and application, but both of them with the same technical characteristics.

The first type (PBL-BF/SC) has to be keyed to a fixed shaft, to which is then freely mounted a cup housing: on one side, this cup housing is milled to anchoring the outer disks of the brake. The moving components to be braked are fixed on the other side.


The second type (PBL-BF) has to be fixed to a wall and a milled hub has to be mounted on the rotating shaft; this hub will insert into the fins of the inner disks.

Both types have fixed cylinders with working pistons, the advantages of which are fully described in the introduction regarding static-cylinder clutches.


For dry application (PBL-BF and PBL/SC-BF), a combination of bronze and steel brake disks is used.

PAR ESTÁTICO APROXIMADO EN RELACION A LA PRESIÓN DE TRABAJO:

APPROXIMATED DETERMINATION OF STATIC MOMENT IN RELATION TO WORKING PRESSURE.

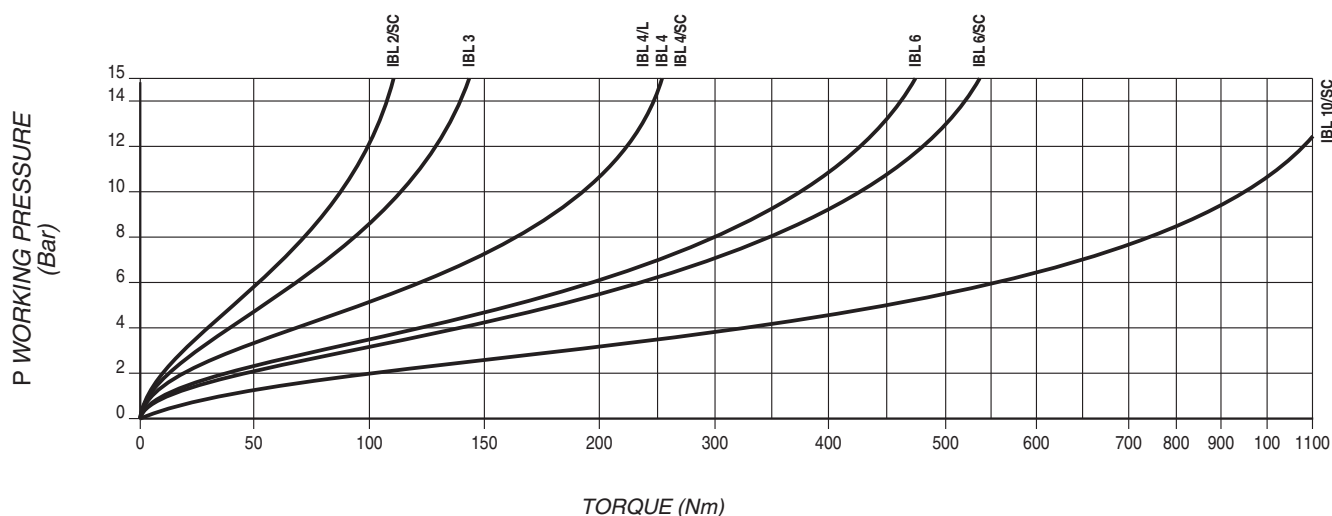


PBL/BF NEUMÁTICO EN SECO
PNEUMATIC DRY APPLICATION

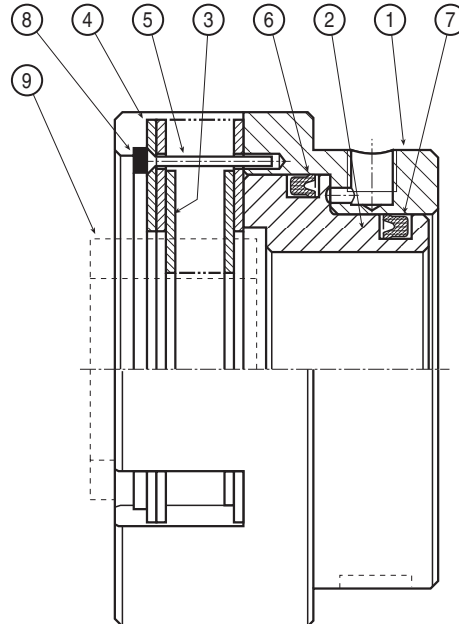

PARTS LIST

1. CUP HOUSING
2. PISTON
3. INNER DISK
4. OUTER DISK
5. SPRING GUIDE PIN
6. OUTER SEAL RING
7. INNER SEAL RING
8. SAFETY RING
9. HUB (ON DEMAND)

EJEMPLO DE MONTAJE **EXAMPLE OF MOUNTING**

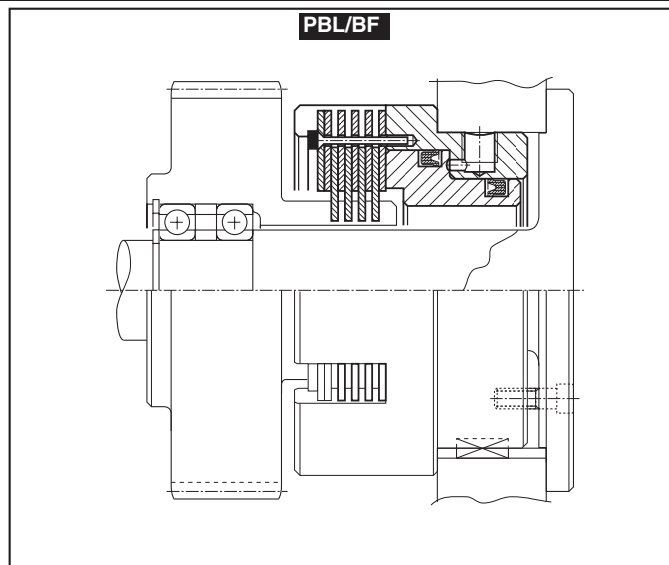


FRENO NEUMÁTICO MULTIDISCO PBL/BF
PNEUMATIC STATIC CYLINDER MULTIDISK BRAKE

IBL ...
PBL .../BF

03

MODEL	PBL □□/BF
CODE	03.04.□□.51

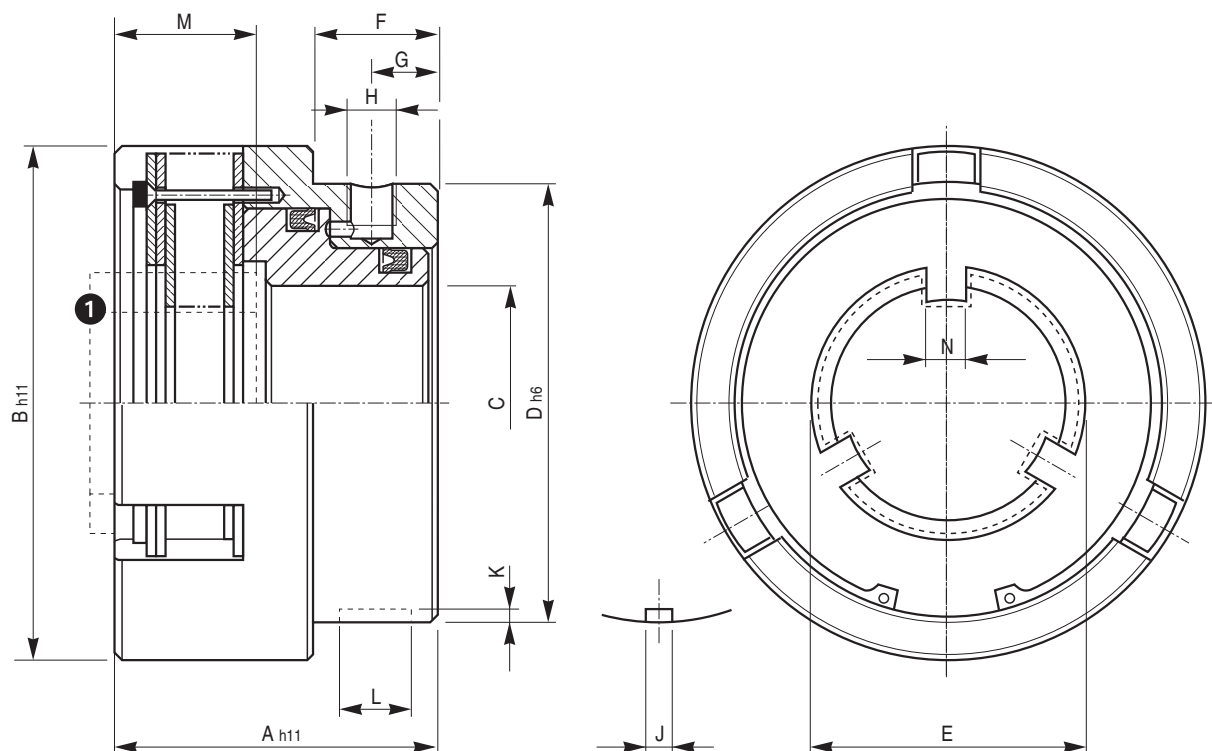

□□	Torques		Working pressure (bar)	Cylinder volume (cm ³)	R.P.M. limit max	Weight (kg)	Internal plates N.	Hub on demand ①
	Mi (Nm)	Ms (Nm)						
03	50	90	8	7	3500	2,3	5	MF 03
04	90	160	8	9	3200	3,3	5	MF 04
05	90	160	8	9	3200	3,3	5	MF 05
06	160	300	8	15	2800	6	6	MF 06

□□	A	B	C	D	E	F	G	H	J	K	L	M	N	Lugs N.
03	64	106	48	88	55	25	13	1/8"	6	3,5	20	28	9	3
04	69	118	56	110	66	28	16	1/8"	8	4	25	31	12	3
05	69	118	56	110	61	28	16	1/8"	8	4	25	31	12	4
06	86	146	70	136	86	38	25	1/8"	10	5	35	34	14	3