




EMBRAGUES NEUMATICOS MULTIDISCO DIRECTOS

LPG



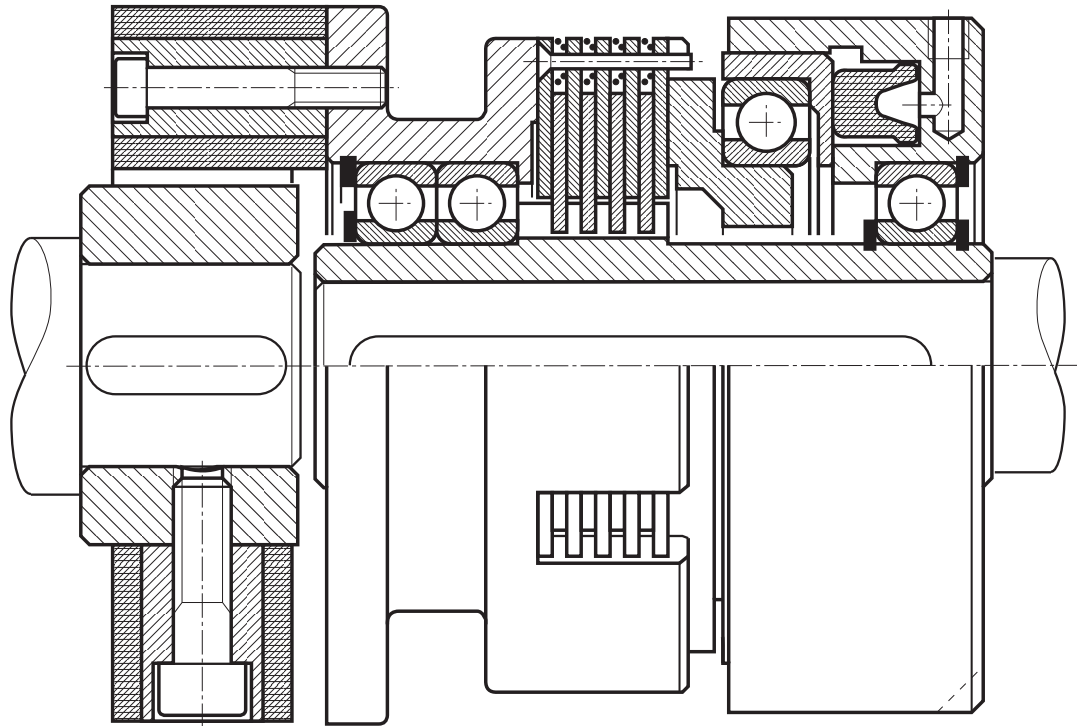

EMBRAGUE NEUMÁTICO MULTIDISCO DIRECTO LPG

PNEUMATIC STATIC-CYLINDER MULTI-DISK CLUTCHES

The excellent technical, construction and operating characteristics of this type of clutch have resulted in a wide range of applications in the manufacturing industry.

Its simple design includes a center hub, a disk pack, two radial bearings and a fixed cylinder with a working piston

Air under pressure enters through the external bore «A», a solution which permits the elimination of complicated channeling and allows several clutches to be mounted on the same shaft.

A series of disk separating springs, generates sufficient axial pressure to allow the quick return of the piston to its neutral position, impacting minimally on the working thrust.

The fixed piston transmits its power to push the rotating disks through a rugged radial bearing.

The stroke of the piston and the thrust springs allow disk-wear take-up, thus eliminating the need for adjustment. Furthermore, mounting of the springs between the disks prevents most of the dragging when in the neutral position, allowing the installation of the clutch in a vertical position, in the presence of very sensitive kinematic or where great uncoupling precision is required.

This series of pneumatic multi-disk clutches has been engineered to run dry, thanks to the choice of using a combination of bronze/steel disks and sealed bearings that actually allow you to work without lubrication.


Variants with transmission sleeve (LPR) and elastic coupling (LPG) further extend the already impressive range of possible applications for these clutches.

To ensure that the clutch operates correctly, the supply pressure must always remain constant: so, it would be better to provide for an accumulation tank, in order to compensate any pressure changes.

Also, the control valve must be mounted as close as possible to the supply bore located on the cylinder and must be equipped with a blow-off device to discharge the piston and, as a result, to quickly disengage the transmission




EMBRAGUE NEUMÁTICO MULTIDISCO DIRECTO LPG

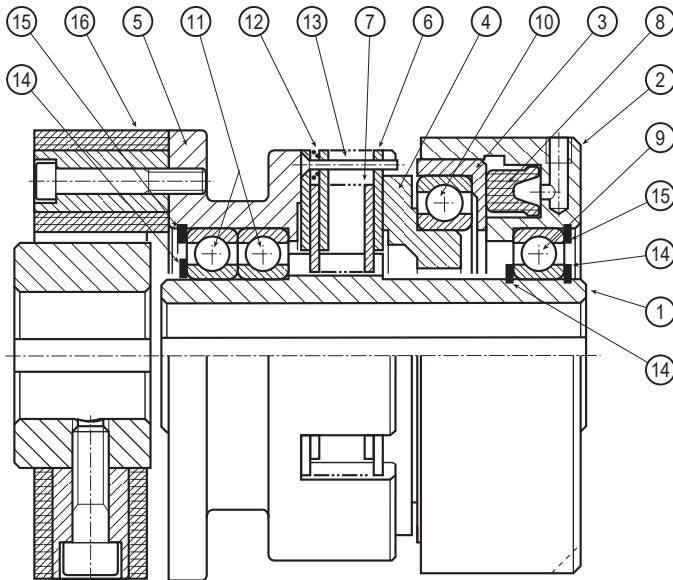

PARTS LIST

1. CENTRAL HUB
2. CYLINDER
3. PISTON
4. THRUST RING
5. TRANSMISSION HUB
6. OUTER DISK
7. INNER DISK
8. SEAL RING
9. HUB BEARING
10. PISTON BEARING
11. TRANSMISSION HUB BEARING
12. DISK SEPARATING SPRING
13. SPRING GUIDE PIN
14. OUTER SAFETY RING
15. INNER SAFETY RING
16. FLEXIBLE COUPLING

EXAMPLES OF MOUNTING

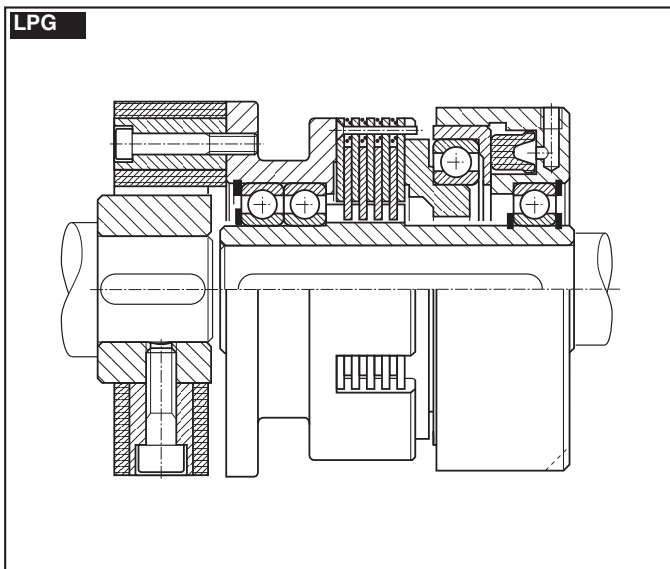

MOUNTING






When mounting, please follow our instructions and examples. The working cylinder must be anchored, but not blocked, by means of a bracket or pin engagement on one of the three 120° milled spots on the working cylinder itself; this bracket is to be hooked onto the most convenient milled spot, in relation to the air supply bore, making sure that the working cylinder has some radial and axial play.



EMBRAGUE NEUMÁTICO MULTIDISCO DIRECTO LPG

PNEUMATIC MULTIDISK CLUTCH WITH FLEXIBLE COUPLING

MODEL	LPG □□□
CODE	03.07.□□□.01

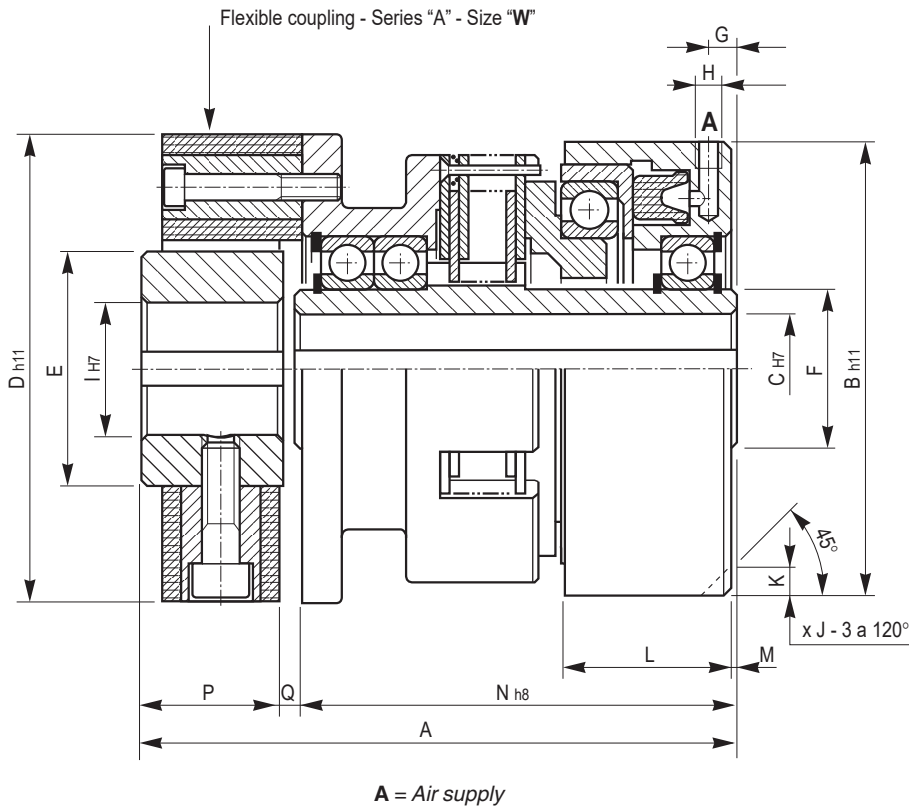

□□□	Mi (Nm)	Torques Ms (Nm)	Working pressure (bar)	Cylinder volume (cm ³)	R.P.M. limit max	Weight (kg)	Internal plates N.	Flexible Coupling Size W
002	44	65	6	4	3000	4,1	4	4
003	75	114	6	6	2800	6,7	4	8
004	140	210	6	10	2400	9,0	5	16
006	330	460	6	16	2000	15,3	5	28
008	590	830	6	30	1800	24	6	50
010	1200	1700	6	50	1400	46	6	140

□□□	A	B	C		D	E	F	G	H	I		JxK	L	M	N	P	Q	X	Y	alpha	gamma
			min.	max						min	max										
002	134	97	12	22	100	45	30	7	1/8"	12	30	10x9	38	1	100	30	4	2	1	1°	6°
003	156	115	16	26	120	60	35	7	1/8"	12	38	10x10	46	1	110	42	4	2	1	1°	7°
004	174	127	18	34	150	70	45	7	1/8"	15	48	10x10	44	1	118	50	6	2	1	1°	7°
006	191	153	20	46	170	85	60	9,5	1/4"	15	55	12x12	49	1,5	130	55	6	3	1	1°	4°
008	224	167	25	50	200	100	65	9	1/4"	20	65	12x12	55	1	150	66	8	3	1	1°	4°
010	263	216	30	68	260	125	85	9	1/4"	30	85	14x14	65	1	175	80	8	3	1	1°	4°